

Precision.
Performance.
Perfection.

HONMA



HONMA

6023 Innovation Way Suite 100, Carlsbad, CA 92009
© 2024 Honma Golf Ltd. All Rights Reserved.

609

BERES





5S



| DRIVER | | | LADIES SPECS | |
|--------------------------------|---|--|--------------|--|
| CLUB | | | 1W | |
| LOFT (deg) | | | 11.5° | |
| LIE ANGLE (deg) | | | 60.0° | |
| HEAD VOLUME (cc) | | | 460 | |
| LENGTH (inch) | | | 44.25" | |
| SHAFT | | | ARMRQ FX | |
| SWINGWEIGHT / TOTAL WEIGHT (g) | L | | C0 / 262 | |
| | A | | C1 / 265 | |

| FAIRWAY | | | 3W | 5W | 7W |
|--------------------------------|---|--|----------|----------|----------|
| CLUB | | | 3W | 5W | 7W |
| LOFT (deg) | | | 16° | 19° | 22° |
| LIE ANGLE (deg) | | | 59.0° | 59.5° | 60.0° |
| HEAD VOLUME (cc) | | | 175 | 162 | 150 |
| LENGTH (inch) | | | 41.75" | 41.25" | 40.75" |
| SHAFT | | | ARMRQ FX | ARMRQ FX | ARMRQ FX |
| SWINGWEIGHT / TOTAL WEIGHT (g) | L | | C0 / 279 | C0 / 283 | C0 / 287 |
| | A | | C1 / 282 | C1 / 286 | C1 / 290 |


| HYBRID | | | 4U | 5U | 6U |
|--------------------------------|---|--|----------|----------|----------|
| CLUB | | | 4U | 5U | 6U |
| LOFT (deg) | | | 22° | 25° | 28° |
| LIE ANGLE (deg) | | | 59.5° | 59.5° | 59.5° |
| HEAD VOLUME (cc) | | | 136 | 136 | 136 |
| LENGTH (inch) | | | 39.0" | 38.5" | 38.0" |
| SHAFT | | | ARMRQ FX | ARMRQ FX | ARMRQ FX |
| SWINGWEIGHT / TOTAL WEIGHT (g) | L | | C0 / 299 | C0 / 304 | C0 / 309 |
| | A | | C1 / 302 | C1 / 307 | C1 / 312 |

| IRONS | | | #6 | #7 | #8 | #9 | #10 | #11 | SW |
|--------------------------------|---|--|----------|----------|----------|----------|----------|----------|----------|
| CLUB | | | #6 | #7 | #8 | #9 | #10 | #11 | SW |
| LOFT (deg) | | | 27.0° | 30.0° | 34.0° | 38.0° | 43.0° | 49.0° | 56.0° |
| LIE ANGLE (deg) | | | 61.5° | 62.0° | 62.5° | 63.0° | 63.0° | 63.0° | 63.5° |
| OFFSET (mm) | | | 3.5 | 3.5 | 3.5 | 3.5 | 3.5 | 3.0 | 2.5 |
| SHAFT | | | ARMRQ FX | | | | | | |
| LENGTH (inch) 60" method | | | 36.5" | 36.0" | 35.5" | 35.0" | 34.5" | 34.0" | 34.0" |
| SWINGWEIGHT / TOTAL WEIGHT (g) | L | | C1 / 331 | C1 / 338 | C1 / 344 | C1 / 351 | C1 / 357 | C1 / 364 | C2 / 366 |
| | A | | C1 / 333 | C1 / 340 | C1 / 346 | C1 / 353 | C1 / 359 | C1 / 366 | C2 / 368 |


Starting in 2024, the club length measurement method will transition to adhere to the R&A standards. As a result, for products released after this transition, even if some clubs are specified as having the same length, they may perceptibly feel slightly shorter in accordance with the new measurement methodology.



4S

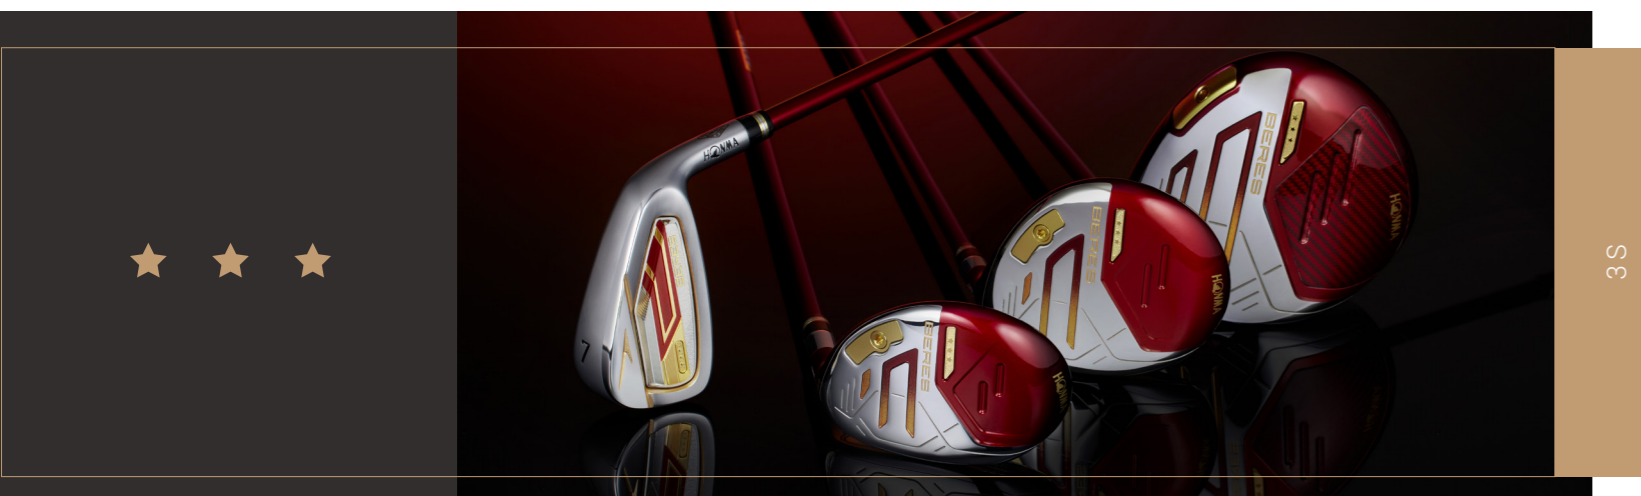


3S

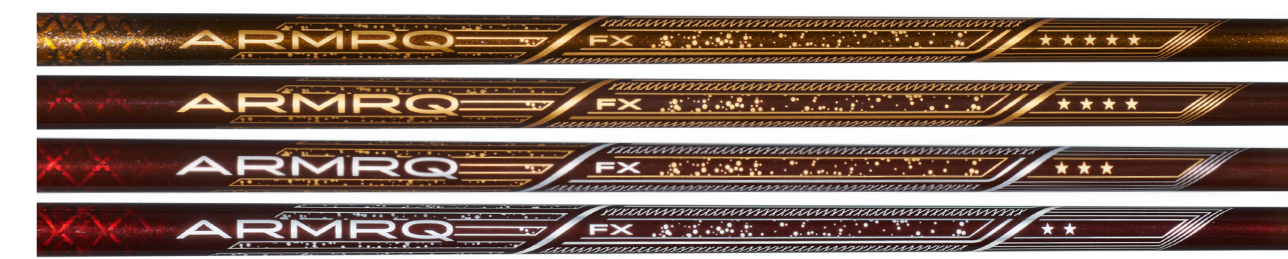

| DRIVER | Flex | Length (mm) | Tip (mm) | Butt (mm) | Weight (g) | | Frequency (CPM) | | Torque (deg) | | | Kick Point | | |
|----------|------|-------------|----------|-----------|------------|---------|-----------------|---------|--------------|------|------|------------|---------|---------|
| | | | | | 2S / 3S | 4S / 5S | 2S / 3S | 4S / 5S | 2S / BK | 3S | 4S | 5S | 2S / 3S | 4S / 5S |
| ARMRQ FX | A | 1,117 | 8.6 | 15.3 | 41.5 | 41.5 | 211.0 | 211 | 8.05 | 7.65 | 7.45 | 7.30 | MID LOW | LOW |
| | L | 1,117 | 8.6 | 15.3 | 40.0 | 40.0 | 203.0 | 203.0 | 8.10 | 7.70 | 7.50 | 7.35 | MID LOW | LOW |

| FAIRWAY | Flex | Length (mm) | Tip (mm) | Butt (mm) | Weight (g) | | Frequency (CPM) | | Torque (deg) | | | Kick Point | | |
|----------|------|-------------|----------|-----------|------------|---------|-----------------|---------|--------------|------|------|------------|---------|---------|
| | | | | | 2S / 3S | 4S / 5S | 2S / 3S | 4S / 5S | 2S / BK | 3S | 4S | 5S | 2S / 3S | 4S / 5S |
| ARMRQ FX | A | 1,065 | 8.6 | 15.3 | 41.0 | 41.0 | 229.0 | 229.0 | 7.55 | 7.15 | 6.95 | 6.80 | MID LOW | LOW |
| | L | 1,065 | 8.6 | 15.3 | 39.5 | 39.5 | 221.0 | 221.0 | 7.60 | 7.20 | 7.00 | 6.85 | MID LOW | LOW |

| HYBRID | Flex | Length (mm) | Tip (mm) | Butt (mm) | Weight (g) | | Frequency (CPM) | | Torque (deg) | | | Kick Point | | |
|----------|------|-------------|----------|-----------|------------|---------|-----------------|---------|--------------|------|------|------------|---------|---------|
| | | | | | 2S / 3S | 4S / 5S | 2S / 3S | 4S / 5S | 2S / BK | 3S | 4S | 5S | 2S / 3S | 4S / 5S |
| ARMRQ FX | A | 1,004 | 9.3 | 15.2 | 40.5 | 40.5 | 240.0 | 240.0 | 7.55 | 7.15 | 6.95 | 6.80 | MID LOW | LOW |
| | L | 1,004 | 9.3 | 15.2 | 39.0 | 39.0 | 232.0 | 232.0 | 7.60 | 7.20 | 7.00 | 6.85 | MID LOW | LOW |

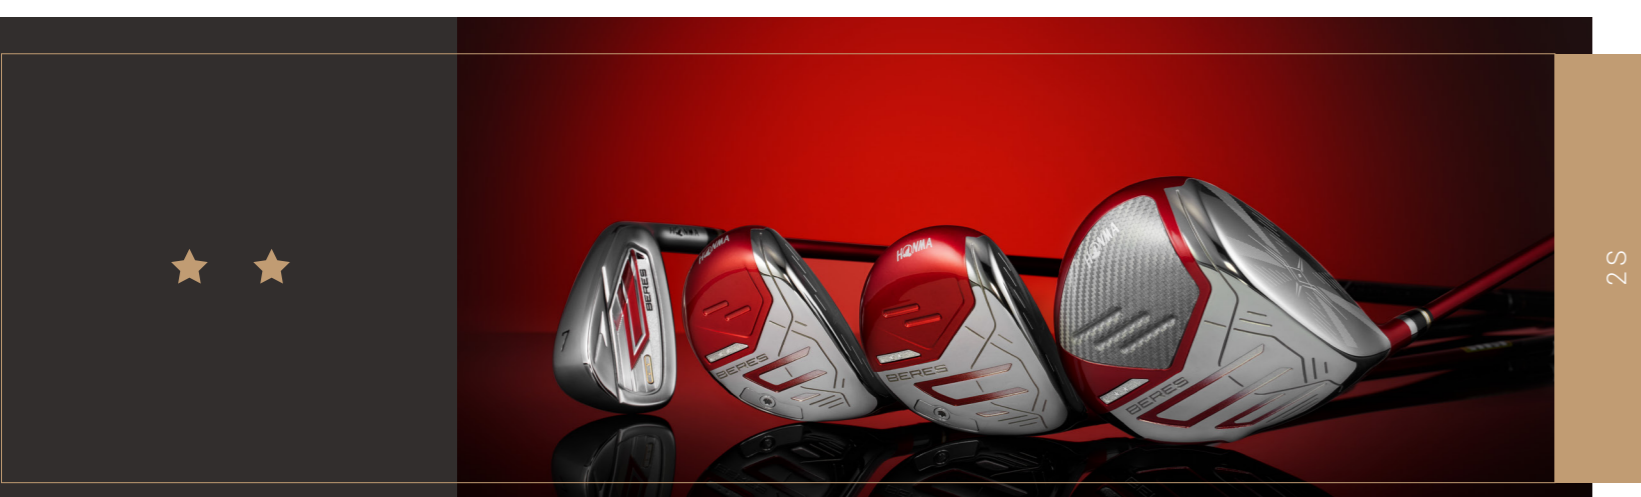

2S



| IRON | Flex | Length (mm) | Tip (mm) | Butt (mm) | Weight (g) | | Frequency (CPM) | | Torque (deg) | | | Kick Point | | |
|----------|------|-------------|----------|-----------|------------|---------|-----------------|---------|--------------|------|------|------------|---------|---------|
| | | | | | 2S / 3S | 4S / 5S | 2S / 3S | 4S / 5S | 2S / BK | 3S | 4S | 5S | 2S / 3S | 4S / 5S |
| ARMRQ FX | A | 923 | 9.3 | 14.3 | 41.5 | 41.5 | 240.0 | 240.0 | 4.83 | 4.43 | 4.23 | 4.08 | MID LOW | LOW |
| | L | 923 | 9.3 | 14.3 | 40.0 | 40.0 | 232.0 | 232.0 | 4.88 | 4.48 | 4.28 | 4.13 | MID LOW | LOW |