

BERES

Precision.  
Performance.  
Perfection.



HONMA



HONMA

6023 Innovation Way Suite 100, Carlsbad, CA 92009  
© 2024 Honma Golf Ltd. All Rights Reserved.



BERES 09 | 5S






5 S



4 S

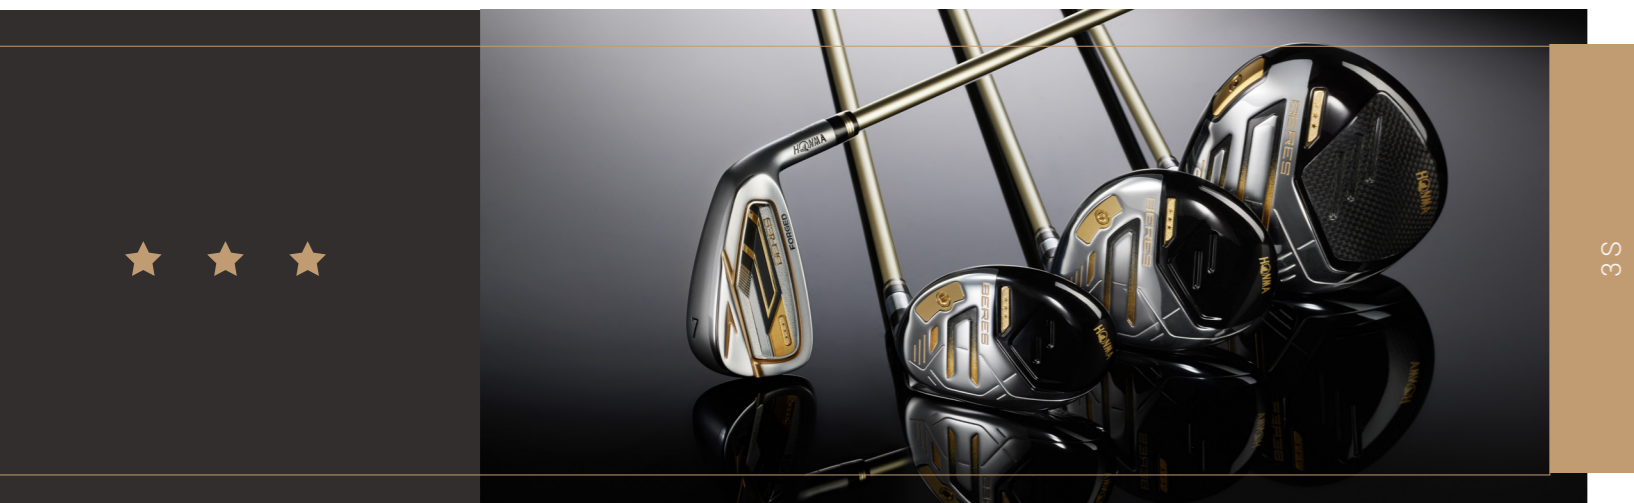

3 S




2 S



MEN'S SPECS											
DRIVER	CLUB	1W									
	LOFT (deg.)	9.5° / 10.5°									
	LIE ANGLE (deg.)	59.0°									
	HEAD VOLUME (cc)	460									
	LENGTH (inch)	45.75"									
	SHAFT	ARMRQ FX									
	SWINGWEIGHT / TOTAL WEIGHT (g)	LIGHT R	C9 / 280	D1 / 285							
	R	D2 / 289	D2 / 291								
	SR										
	S										
FAIRWAY	CLUB	3W	5W								
	LOFT (deg.)	15°	18°								
	LIE ANGLE (deg.)	59.0°	59.5°								
	HEAD VOLUME (cc)	186	172								
	LENGTH (inch)	43.0"	42.5"								
	SHAFT	ARMRQ FX	ARMRQ FX								
	SWINGWEIGHT / TOTAL WEIGHT (g)	LIGHT R	C8 / 296	C8 / 300							
	R	D0 / 301	D0 / 305								
	SR	D1 / 306	D1 / 310								
	S	D1 / 309	D1 / 313								
HYBRID	CLUB	3U	4U	5U							
	LOFT (deg.)	19°	22°	25°							
	LIE ANGLE (deg.)	59.5°	59.5°	59.5°							
	HEAD VOLUME (cc)	136	136	136							
	LENGTH (inch)	40.5"	40.0"	39.5"							
	SHAFT	ARMRQ FX	ARMRQ FX	ARMRQ FX							
	SWINGWEIGHT / TOTAL WEIGHT (g)	LIGHT R	C8 / 313	C8 / 318	C8 / 323						
	R	D0 / 318	D0 / 323	D0 / 328							
	SR	D1 / 324	D1 / 329	D1 / 334							
	S	D1 / 326	D1 / 331	D1 / 336							
IRONS	CLUB	#5	#6	#7	#8	#9	#10	#11	AW	SW	
	LOFT (deg.)	21.0°	24.0°	27.0°	31.0°	35.0°	40.0°	45.0°	50.0°	55.0°	
	LIE ANGLE (deg.)	61.0°	61.5°	62.0°	62.5°	63.0°	63.0°	63.0°	63.0°	64.0°	
	OFFSET (mm)	4.0	3.7	3.5	3.5	3.5	3.5	3.0	3.0	2.0	
	SHAFT	ARMRQ FX									
	LENGTH (inch)	38.25"	37.75"	37.25"	36.75"	36.25"	35.75"	35.50"	35.50"	35.00"	35.00"
	SWINGWEIGHT / TOTAL WEIGHT (g)	LIGHT R	C8 / 343	C8 / 349	C8 / 356	C8 / 362	C8 / 369	C8 / 375	C8 / 378	C8 / 378	C9 / 386
		R	C8 / 344	C8 / 350	C8 / 357	C8 / 363	C8 / 370	C8 / 376	C8 / 379	C8 / 379	C9 / 387
		SR	C9 / 350	C9 / 356	C9 / 363	C9 / 369	C9 / 376	C9 / 382	C9 / 385	C9 / 385	D0 / 393
		S	C9 / 351	C9 / 357	C9 / 364	C9 / 370	C9 / 377	C9 / 383	C9 / 386	C9 / 386	D0 / 394

Starting in 2024, the club length measurement method will transition to adhere to the R&A standards. As a result, for products released after this transition, even if some clubs are specified as having the same length, they may perceptibly feel slightly shorter in accordance with the new measurement methodology.

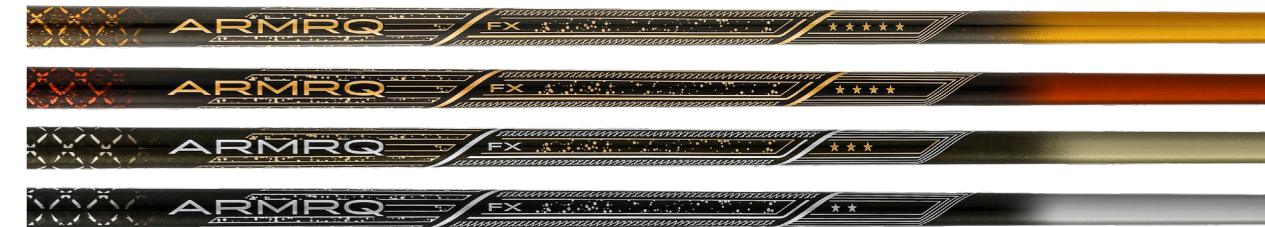

DRIVER	Flex	Length (mm)	Tip (mm)	Butt (mm)	Weight (g)		Frequency (CPM)		Torque (deg)			Kick Point		
					2S / 3S	4S / 5S	2S / 3S	4S / 5S	2S / BK	3S	4S	5S	2S / 3S	4S / 5S
ARMRQ FX	S	1,153	8.6	15.6	50.5	52.0	238	243	7.15	6.75	6.55	6.40	MID	MID LOW
	SR	1,153	8.6	15.6	48.0	48.5	230	230	7.25	6.85	6.65	6.50	MID	MID LOW
	R	1,153	8.6	15.2	45.5	46.0	218	223	7.95	7.55	7.35	7.20	MID	MID LOW
ARMRQ FX LIGHT	R	1,153	8.6	15.2	43.0	43.5	209	212	8.00	7.60	7.35	7.20	MID	MID LOW
FAIRWAY	S	1,093	8.6	15.6	50.0	51.0	258	263	6.65	6.25	6.05	5.90	MID	MID LOW
	SR	1,093	8.6	15.6	48.0	48.5	250	250	6.75	6.35	6.15	6.00	MID	MID LOW
	R	1,093	8.6	15.2	44.5	45.0	234	240	7.45	7.05	6.85	6.70	MID	MID LOW
ARMRQ FX LIGHT	R	1,093	8.6	15.2	42.0	42.5	223	229	7.50	7.10	6.85	6.70	MID	MID LOW
HYBRID	S	1,030	9.3	15.4	49.0	49.0	276	281	6.65	6.25	6.05	5.90	MID	MID LOW
	SR	1,030	9.3	15.4	47.0	47.5	269	269	6.75	6.35	6.15	6.00	MID	MID LOW
	R	1,030	9.3	15.1	42.5	43.0	249	258	7.45	7.05	6.85	6.70	MID	MID LOW
ARMRQ FX LIGHT	R	1,030	9.3	15.1	40.0	40.5	238	247	7.50	7.10	6.85	6.70	MID	MID LOW
IRON	S	964	9.3	14.4	52.5	53.5	263	271	4.71	4.31	4.11	3.96	MID	MID LOW
	SR	964	9.3	14.5	52.0	52.5	253	261	4.81	4.41	4.21	4.06	MID	MID LOW
	R	964	9.3	14.5	47.5	48.5	240	244	4.90	4.50	4.30	4.15	MID	MID LOW
ARMRQ FX LIGHT	R	964	9.3	14.5	46.0	47.0	232	236	4.95	4.55	4.35	4.20	MID	MID LOW